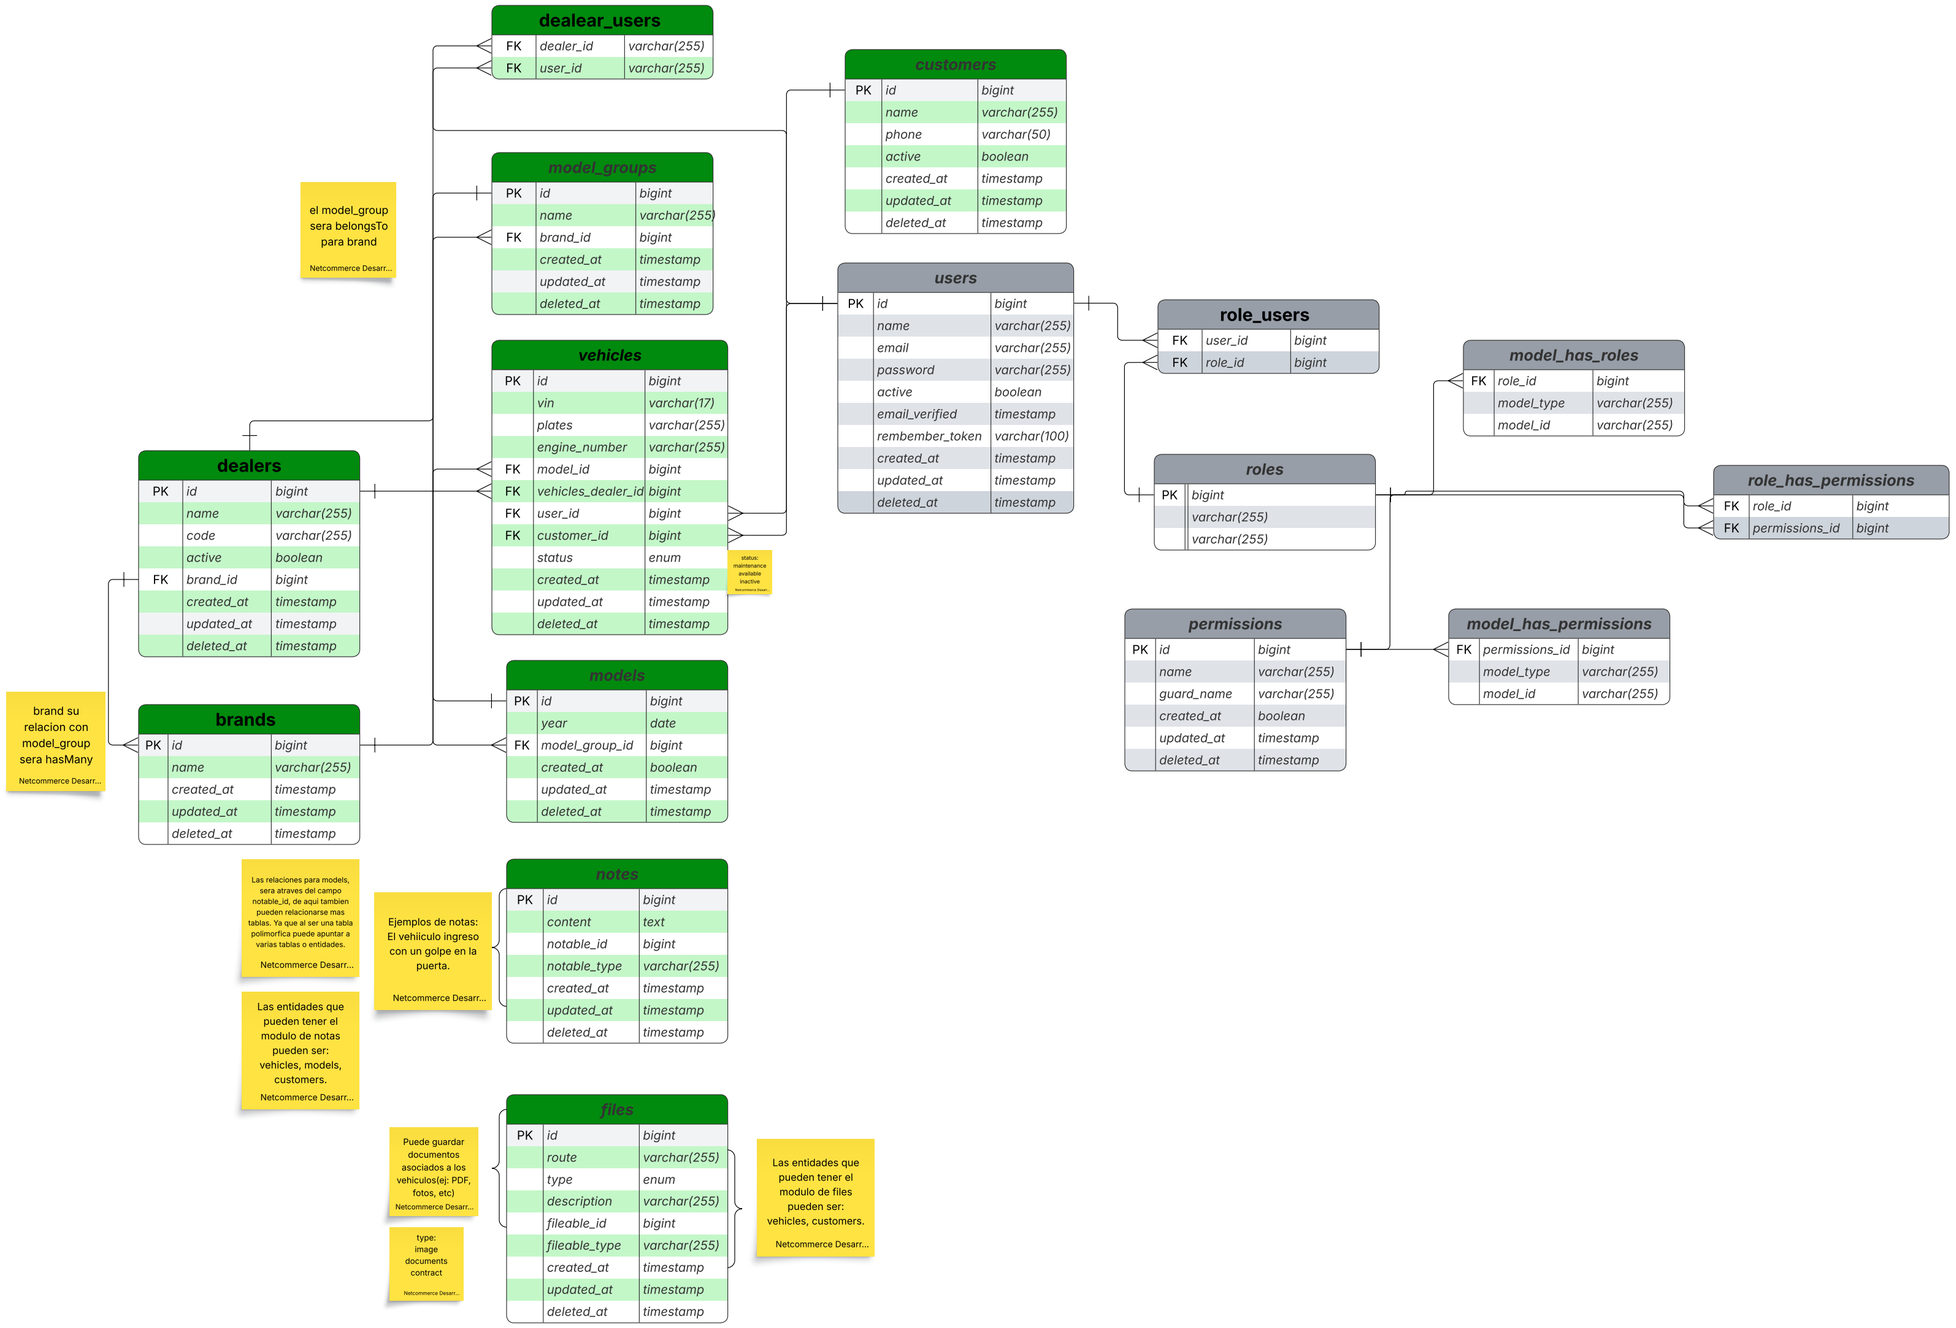
dealear_users
FK dealer_id varchar(255)
FK user_id varchar(255)
customers
PK id bigint
name varchar(255)
phone varchar(50)
active boolean
created_at timestamp
updated_at timestamp
deleted_at timestamp
model_groups
PK id bigint
name varchar(255)
FK brand_id bigint
created_at timestamp
updated_at timestamp
deleted_at timestamp
el model_group sera belongsTo para brand
Netcommerce Desarr...
users
PK id bigint
name varchar(255)
email varchar(255)
password varchar(255)
active boolean
email_verified timestamp
rembember_token varchar(100)
created_at timestamp
updated_at timestamp
deleted_at timestamp
role_users
FK user_id bigint
FK role_id bigint
model_has_roles
FK role_id bigint
model_type varchar(255)
model_id varchar(255)
vehicles
PK id bigint
vin varchar(17)
plates varchar(255)
engine_number varchar(255)
FK model_id bigint
FK vehicles_dealer_id bigint
FK user_id bigint
FK customer_id bigint
status enum
created_at timestamp
updated_at timestamp
deleted_at timestamp
status: maintenance available inactive
Netcommerce Desarr...
dealers
PK id bigint
name varchar(255)
code varchar(255)
active boolean
FK brand_id bigint
created_at timestamp
updated_at timestamp
deleted_at timestamp
roles
PK bigint
varchar(255)
varchar(255)
role_has_permissions
FK role_id bigint
FK permissions_id bigint
permissions
PK id bigint
name varchar(255)
guard_name varchar(255)
created_at boolean
updated_at timestamp
deleted_at timestamp
model_has_permissions
FK permissions_id bigint
model_type varchar(255)
model_id varchar(255)
brand su relacion con model_group sera hasMany
Netcommerce Desarr...
brands
PK id bigint
name varchar(255)
created_at timestamp
updated_at timestamp
deleted_at timestamp
models
PK id bigint
year date
FK model_group_id bigint
created_at boolean
updated_at timestamp
deleted_at timestamp
Las relaciones para models, sera atraves del campo notable_id, de aqui tambien pueden relacionarse mas tablas. Ya que al ser una tabla polimorfica puede apuntar a varias tablas o entidades.
Netcommerce Desarr...
Ejemplos de notas: El vehiculo ingreso con un golpe en la puerta.
Netcommerce Desarr...
notes
PK id bigint
content text
notable_id bigint
notable_type varchar(255)
created_at timestamp
updated_at timestamp
deleted_at timestamp
Las entidades que pueden tener el modulo de notas pueden ser: vehicles, models, customers.
Netcommerce Desarr...
Puede guardar documentos asociados a los vehiculos(ej: PDF, fotos, etc)
Netcommerce Desarr...
type: image documents contract
Netcommerce Desarr...
files
PK id bigint
route varchar(255)
type enum
description varchar(255)
fileable_id bigint
fileable_type varchar(255)
created_at timestamp
updated_at timestamp
deleted_at timestamp
Las entidades que pueden tener el modulo de files pueden ser: vehicles, customers.
Netcommerce Desarr...